

48-1 CO₂ Laser

Most reliable laser with 10 Watts of average power for marking and coding applications



High performance CO₂ laser proven to deliver consistent results year after year

- Proven, economical industry standard for reliable performance and long lifetime
- Most popular Synrad laser series, 25+ years of operational history around the globe
- Reliable 24/7 operation, built with Synrad's unique rigid core box structure for the most demanding industrial environments
- Compact size and light weight for easy integration onto a variety of marking, engraving, and small cutting systems
- Flexible materials processing capability with 10.6 μm and 9.3 μm wavelengths available
- Available in air or water-cooled models



Specifications

Output Specifications		
Wavelength	9.3 μm	10.6 μm
Output Power ¹	>8 W	>10 W
Power Stability (cold start) ²	±15%	±10%
Beam Quality (M ²)	<1.2	
Beam Diameter ³	3.5 mm	
Divergence (full angle)	4.0 mrad	
Ellipticity	<1.2	
Polarization	Linear (Vertical)	
Rise Time	<150 μs	
Operating Frequency	0 - 25 kHz	
Power Supply		
DC Input Voltage	30 VDC	
Maximum Current	7.0 A	
Cooling		
Maximum Heat Load	300 W	
Coolant Temperature	< 40° C (air), 18-22° C (water)	
Minimum Flow Rate	250 CFM, 2 required (air) 0.5 GPM, <60 PSI (water)	
Environmental		
Operating Ambient Temperature	15 - 40° C	
Maximum Humidity	95%, non-condensing	
Physical		
OEM Air Cooled Dimensions (LxWxH) mm (inches)	429 x 71 x 107 (16.9 x 2.8 x 4.2)	
Water Cooled Dimensions (LxWxH) mm (inches)	460 x 71 x 107 (18.1 x 2.8 x 4.2)	
Weight	4.1 kg (9.0 lbs.)	

The Classic Synrad Laser


For more than 25 years Synrad has been delivering the 48 Series to OEMs, integrators, and end-users around the globe. The 48-1 is the most widely used 10 Watt laser for industrial applications. Reliability and near maintenance free marking, coding, and engraving are hallmark characteristics of this classic Synrad laser.



1 - Power level guaranteed for 3 years from date of shipment, regardless of operation hours, within recommended coolant flow rate and temperature range.

2 - Measured from cold start as $\pm(P_{max}-P_{min})/(P_{max}+P_{min})$

3 - Measured 1/e² diameter at laser output.




SYNRAD


A Novanta Company

48-1 CO₂ Laser

Outline and Mounting Illustrations dimensions are in mm (inches)

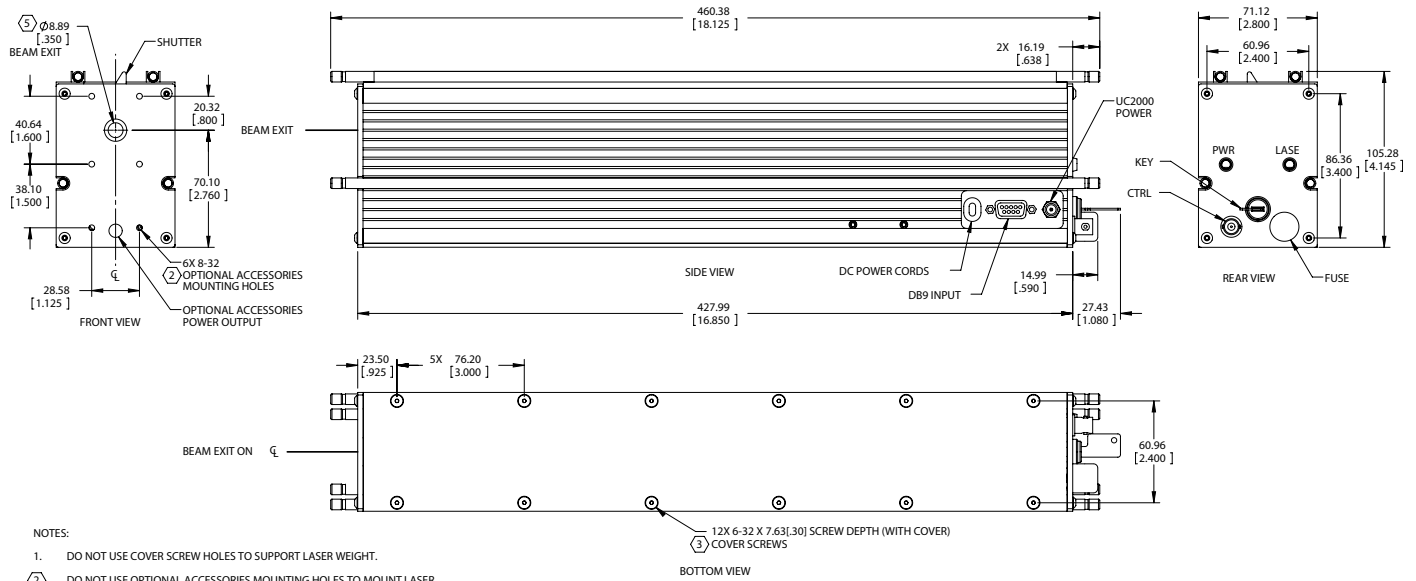

Recommended Applications

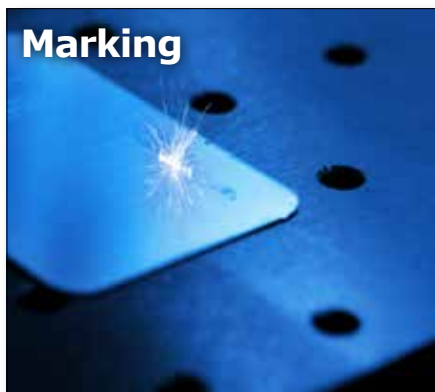

Marking

Enable fast, easy tracking and identification by applying permanent marks, text, and codes to a wide variety of materials.



Coding

Easily applies permanent alpha numeric codes, barcodes, text, and expiration dates to a variety of packaging materials that will not smear or rub off.



Engraving

Enhance tactile experience or enable quick identification of organic materials by adding distinctive texture, contours, marks, or text.

Contact Us

synrad.com

Americas & Asia Pacific

Synrad
4600 Campus Place
Mukilteo, WA 98275
P (425) 349.3500
F (425) 349.3667
synrad@synrad.com

Europe, Middle East, Africa

Novanta Europe GmbH
Division Synrad Europe
Parkring 57-59
D-85748, Garching, Germany
P +49 (0)89 31707 0
F +49 (0)89 31707 222
sales-europe@synrad.com

China

Synrad China Sales and Service Center
Unit C, 5/F, Ting Wei Industrial Park
Liufang Road, Baoan District, Shenzhen
Guangdong, PRC 518133
P +86 (755) 8280 5395
sales-china@synrad.com

Japan

Novanta Japan Co., Ltd.
4666 Ikebe-cho Tsuzuki-ku
Yokohama Kanagawa 224-0053 Japan
P +81 3 5753 2462
F +81 3 5753 2467
sales-japan@synrad.com